

**Specifications**

**Model Number:** 10-0201  
**Input Voltage:** 120 VAC  
**Frequency:** 50/60 Hz.  
**Lamp Types:** See Chart On Next Page  
**Certifications:** CSA UL #E191525  
**Size:** 11.73" x 3.23" x 1.23"  
**Weight:** 32.8 oz.  
**Mounting:** Slotted Mounting Tabs



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.



<p style="writing-mode: vertical-rl; transform: rotate(180deg);"><b>120V 50/60 HZ</b></p> <p><b>10-0201</b></p>	<p>No. 00-0269</p> <p><b>ATLANTIC ULTRAVIOLET CORPORATION</b></p> <p>375 Marcus Boulevard • Hauppauge, NY 11788          631.273.0500 • Fax: 631.273.0771          info@ultraviolet.com • www.ultraviolet.com          www.buyultraviolet.com</p> <p><b>Danger High Voltage!</b>          Ballast case must be grounded in accordance with National Electric Code.          Disconnect input power before installing or servicing. Ballast Must Be Grounded.</p>	<p><b>120V HIGH POWER FACTOR</b></p> <p>INPUT: 120VAC 50/60HZ          MAXIMUM CURRENT: 1.82 A          RFL. EMI: FCC Part 18A          SOUND RATING: A          CLASS: P          TYPE: 1 or 2 Outdoor</p> <p>MAX. VOLTAGE OUTPUT          CIRCUIT OR TO GROUND: 600 VAC          INSTANT START          MIN. BALLAST START: -20°F          MIN. LAMP START: See Lamp Specs</p> <p>APPROVED FOR LAMP COMBINATION OF 220W MAX. CFS4P/CFQ4P/CFM4P/CR224P/CR24P/CR44P/CR550S4P/LINEAR T8HO, T8O, T10HO, T12, T12HO AND T10HO. WHEN USED PER WIRING DIAGRAM SUITABLE FOR "AIR HANDLING SPACES" TYPE "HL" APPROVED</p>	<p><b>Surelite™</b> ELECTRONIC BALLAST</p> <p><b>UL US</b> #E191525</p> <p>FLUORESCENT LAMP BALLAST 34EF</p>
---	--	--	--

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

---


Lamp Types	Wiring Diagram
Sanitron® S2400C Lamp Part No. 05-1311-R	1
GX48L	1
GX48VZ	1
GX48L/4	2
GX48VZ/4	2

This ballast may be acceptable for use with lamps not listed here.  
Contact us to discuss your requirement.

**Connections**


---

**Wiring Diagram 1**

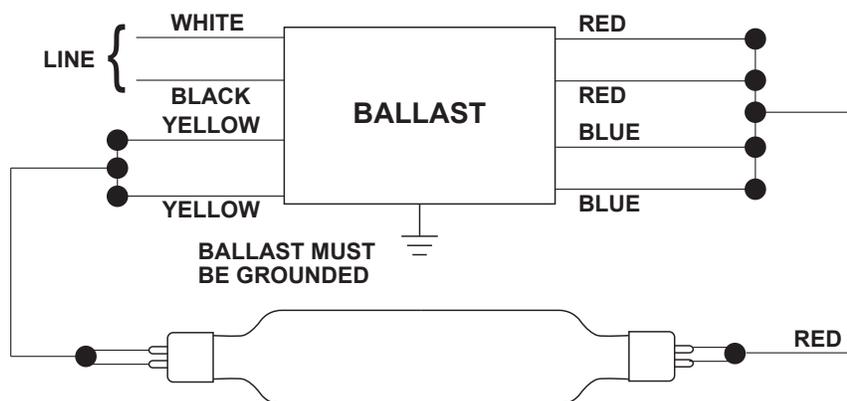

**Wiring Diagram 2**

Call factory with additional connection questions  
631-273-0500

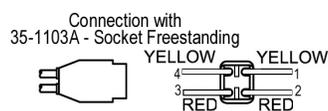

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.