

# CB20-312E Water Filter

High flow, high capacity carbon filter for chloramine and chlorine reduction



## APPLICATIONS

Coffee

Ice

Fountain

## FEATURES AND BENEFITS

Improves the taste and consistency of beverages and ice by reducing chloramine, chlorine and other off-tastes and odors.

CC1E radial flow cartridge in which the water flows from outside of the cartridge to the center core allowing for greater granular activated carbon (GAC) capacity.

CC3E cartridges fine filter water by reducing sediment and dirt larger than 1/2 micron in size.

Reduces asbestos fibers and cysts such as *Cryptosporidium* and *Giardia*.

High pressure housing includes head with flush valve kit, mounting bracket and bowl. Integral inlet and outlet pressure gauge monitors operation.



**CB20-312E System:**

**CB20-312E Cartridge Kit\*:**

**EV9100-37**

**EV9105-34**

\*(1) CC1E replacement cartridge  
(2) CC3E replacement cartridges

## OPERATIONAL TIPS

Change cartridges on a regular 6 month preventative maintenance program.

Change cartridges when capacity is reached (85,000 gallons) or when flow becomes too slow.

Change cartridges when the difference between the two pressure gauges is greater than or equal to 20 psi.

Service flow rate must not exceed 5.0 gpm

After installing CC1E cartridge, flush at full flow for 5 minutes. Install CC3E cartridges and flush system for 10 minutes.

## SPECIFICATIONS

<b>Overall Dimensions:</b>	29.5"H x 25"W x 15.125"D (74.93 x 63.5 x 38.41 cm)
<b>Inlet Connection</b>	1/2"
<b>Outlet Connection</b>	1/2"
<b>Service Flow Rate:</b>	Maximum 5 gpm (19 Lpm)
<b>Rated Capacity:</b>	85,000 Gallons (321,76 L)
<b>Pressure Requirements:</b>	20 - 100 psi (1.4 - 6.9 bar), non-shock
<b>Maximum Temperature:</b>	35 - 100°F (2 - 38°C)
<b>Electrical Connection:</b>	None required
<b>Shipping Weight:</b>	82 lbs. (37.19 kg)
<b>Operating Weight:</b>	90 lbs. (40.82 kg)

# CB20-312E Water Filter

## EV9100-37

### INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating.

Never use a saddle valve for connection.

Use 1/2" water line.

Install on cold water lines only

Do not install where unit is exposed to direct sunlight


Allow a minimum of 4" clearance under the filter to facilitate cartridge change

Do not braze/solder fittings into head

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

*Everpure reserves the right to update specifications, change prices, or make substitutions without notice.*

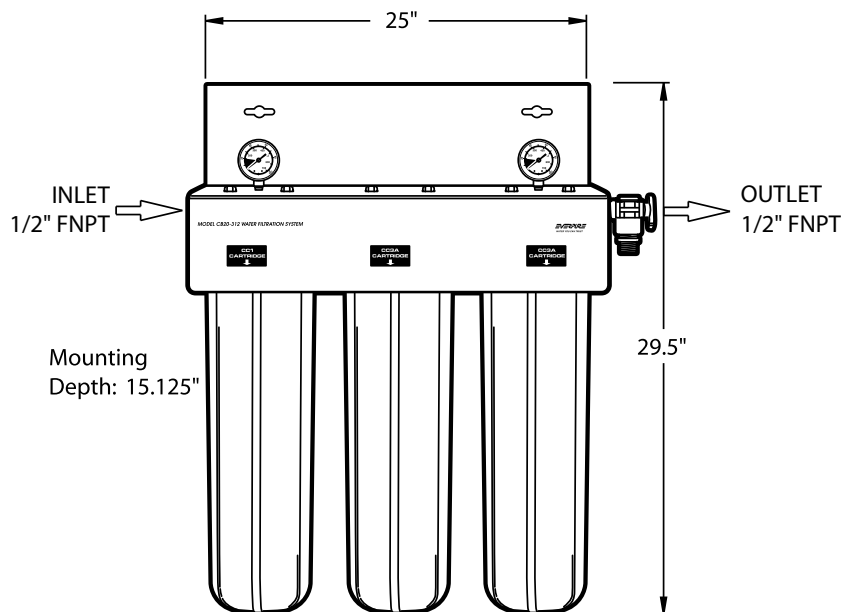

System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

Standard No. 42 —  
Aesthetic Effects  
Chemical Reduction  
Taste and Odor  
Chloramines  
Chlorine  
Mechanical Filtration  
Particulate Class I  
Standard No. 53 —  
Health Effects  
Mechanical Filtration  
Cyst

EV9100-37 CB20-312E JE11

# EVERPURE

WATER YOU CAN TRUST®

Visit our website at [www.everpure.com](http://www.everpure.com)

Everpure-SHURflo India  
Green Boulevard, B-9/A, 7th Floor -  
Tower B Sector 62, Noida - 201301  
TEL: 91.120.419.9444  
FAX: 91.120.419.9400  
EMAIL: [indiacustomer@pentair.com](mailto:indiacustomer@pentair.com)

Everpure-SHURflo Japan Inc.  
Hashimoto MN Bldg. 7F  
3-25-1 Hashimoto, Midori-ku  
Sagamihara-Shi Kanagawa 252-0143  
JAPAN  
TEL: 81.(0)42.775.3011  
FAX: 81.(0)42.775.3015  
EMAIL: [info@everpure.co.jp](mailto:info@everpure.co.jp)

Everpure-SHURflo China  
21F Cloud 9 Plaza, No 1118,  
Shanghai, 200052  
CHINA  
TEL: 86.21.3211.4588  
FAX: 86.21.3211.4580  
EMAIL: [China.Water@Pentair.com](mailto:China.Water@Pentair.com)

Pentair Filtration Solutions, LLC  
World Headquarters-Everpure/SBURflo  
North and South America Sales  
1040 Muirfield Dr.  
Hanover Park, Illinois 60133  
USA  
TEL: 800.942.1153 (US only)  
TEL: 630.307.3000  
FAX: 630.307.3030  
EMAIL: [cseverpure@pentair.com](mailto:cseverpure@pentair.com)

Everpure-SHURflo Australia  
2 Redwood Drive  
Notting Hill  
Victoria, 3168  
AUSTRALIA  
TEL: 011.61.39.574.4000  
FAX: 011.61.39.562.7237  
EMAIL: [au.everpure@pentair.com](mailto:au.everpure@pentair.com)

Everpure-SHURflo Southeast Asia  
18 Boon Lay Way  
#04-110/111  
TradeHub 21, 609966  
SINGAPORE  
TEL: 65.6795.2213  
FAX: 65.6795.2219  
EMAIL: [cseverpure@pentair.com](mailto:cseverpure@pentair.com)

Everpure-SHURflo Europe  
Pentair WWater Belgium bvba  
Industriepark Wolfstee  
Toekomstlaan  
30 B-2200 Herentals, BELGIUM  
TEL: +32.(0).14.283.500  
FAX: +32.(0).14.283.505  
EMAIL: [sales@everpure-europe.com](mailto:sales@everpure-europe.com)