

3M™ Water Filtration Products

SPEC# _____

QUANTITY _____

Application: **MULTIPLE EQUIPMENT**

model:

SW260-PLUS



The SW260-PLUS water filtration system manufactured by 3M Purification Inc., provides consistent high-quality water for multiple applications of cold beverages, ice and coffee. The integrated pre-filter media helps protect down stream equipment and reduces particulate particles that can cause beverages and ice to be cloudy and unappealing. Premium activated carbon reduces chloramines and chlorine taste and odor for consistent, great tasting cold beverages. The SW-SR-60 ice cartridge includes scale inhibition media to reduce scale build-up on evaporator plates in ice machines. The system reduces filterable cysts¹ to maintain drinking water quality.

PRODUCT BENEFITS

- Integrated Membrane Pre-Activated Carbon Technology (“I.M.P.A.C.T”) helps reduce chloramine, particulate, cyst and chlorine taste and odor.
- Dual outlet connections (barbed) supplies two different and separate water qualities for beverages and ice.
- Integrated shut-off valve allows for simple and quick cartridge change-outs.
- Sanitary Quick Change (SQC) encapsulated media reduces contamination during change-outs.
- Built-in pre-filtration helps extend the life of cartridges, lowering operating costs.
- Manifold designed specifically to provide high flow rates with minimal pressure drop.
- Built-in pressure gauge, with red follower needle, indicate when the cartridges are reaching the end of their service life.
- NSF and/or FDA CFR-21 compliant materials.



PRODUCT SPECIFICATIONS

Model Number	Part Number	Reduction Claims	Micron Rating	Capacity	System Flow Rate	Replacement Cartpak	Case Qty.
SW260-PLUS	5629501	Particulate, Chloramine ³ , Chlorine Taste and Odor ³ , Cyst ¹ , Scale ²	0.5	Beverage: 9,400 gallons (35,583 liters)	Ice: 3.34 gallons (12.64 lpm) Beverage: 4.4 gpm (16.65 lpm)	Part Number 5613824 Includes 2-beverage cartridges 1-ice cartridge	1

¹Based on the use of Cryptosporidium parvum oocysts


²As tested and verified by manufacturer's laboratory

³As tested and verified by third party laboratory



SW260-PLUS

SPEC# _____
QUANTITY _____
MODEL NUMBER _____
PART NUMBER _____

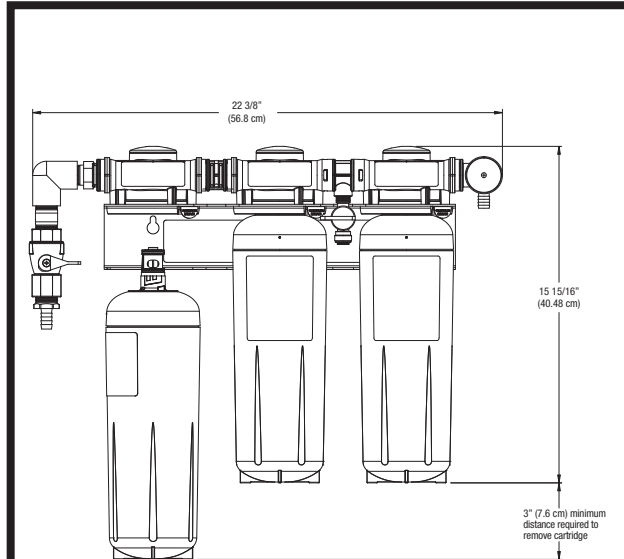

3M™ Water Filtration Products

SPECIFICATIONS

- Modular manifold design provides high flow rates with minimal pressure drop.
- System materials are NSF and/or FDA CFR-21 compliant.
- Filter cartridges require no activation.
- Filter cartridges incorporate a double o-ring type seal.
- Advanced Integrated Membrane Pre-Activated Carbon Technology ("I.M.P.A.C.T.") media incorporates carbon block technology.
- Scale inhibition cartridge provides a controlled release of food grade scale inhibition material.
- Sanitary Quick Change (SQC) cartridges require no contact with the media during change-out.
- Each cartridge is rated for 0.5 micron nominal particulate reduction capability.
- Helps reduce chloramines and chlorine taste and odor for 9,400 gallons (35,583 liters)
- Maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (38°C).
- Service rate of 4.4 gpm (16.65 lpm) for beverage and 3.34 gpm (12.64 lpm) for ice.

SAFETY INFORMATION

⚠ WARNING: To reduce the risk associated with the ingestion of contaminants:

- **Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.** Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment #10350-MN-007

NOTICE: To reduce the risk associated with property damage due to water leakage or flooding:

- **Read and follow** all Instructions before installation and use of this system.

To reduce the risk of water leakage or flooding, and to ensure optimal filter performance:

- Change the disposable filter cartridge every 12 months or sooner if you observe a noticeable reduction in water flow rate.
- Failure to replace the disposable filter cartridge at recommended intervals may lead to reduced filter performance and cracks in the filter housing, causing water leakage or flooding.
- For questions or concerns, please contact Customer Service at 1-800-800-0657.

3M Purification Inc. recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. 3M Purification Inc. shall not be liable for system failures due to improper maintenance.

LIMITED WARRANTY

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application

Warranty, Limited Remedy and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M

3M Purification Inc.
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 1-866-990-9785
Worldwide: 203-237-5541
Fax: 203-238-8701
www.3Mpurification.com
www.3Mfoodservice.com

3M is a trademark of 3M Company.
NSF is a trademark of NSF International.
Subway is a trademark of Doctor's Associates Inc.
© 2014 3M Company. All rights reserved.
70020326552 REV 1014



Visit www.nsf.org for the claims associated with products that are NSF listed.